

INTERNATIONAL ELECTROTECHNICAL COMMISSION **IEC Certification System for Explosive Atmospheres**

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.: **IECEx UL 18.0036X** Page 1 of 4

Certificate history:

Current Status:

Issue No: 2

Issue 1 (2021-03-22) Issue 0 (2018-09-14)

Date of Issue: 2022-04-12

ExRobotics B.V. Applicant:

> Effenseweg 1 Breda, 4838 BA Netherlands

Equipment: Drive Module, DRV-SW-001925

Optional accessory:

Type of Protection: Flameproof "db"

Ex db IIB T4 Gb Marking:

> -40°C ≤ Ta ≤ +60°C or -40°C ≤ Ta ≤ +55°C

Approved for issue on behalf of the IECEx

Certification Body:

Katy A. Holdredge

Position:

Senior Staff Engineer

Signature:

(for printed version)

(for printed version)

- This certificate and schedule may only be reproduced in full.
 This certificate is not transferable and remains the property of the issuing body.
 The Status and authenticity of this certificate may be verified by visiting www.iecex.com or use of this QR Code.



Certificate issued by:

UL LLC 333 Pfingsten Road Northbrook IL 60062-2096 **United States of America**





Certificate No.: IECEx UL 18.0036X Page 2 of 4

Date of issue: 2022-04-12 Issue No: 2

Manufacturer: ExRobotics B.V.

Effenseweg 1 Breda, 4838 BA **Netherlands**

ExRobotics B.V.

Manufacturing

locations: Effenseweg 1
Breda, 4838 BA
Netherlands

Ex Robotics B.V. Delftechpark 26, Delft 2628 XH

Netherlands

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended

STANDARDS:

The equipment and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards

IEC 60079-0:2017 Explosive atmospheres - Part 0: Equipment - General requirements

Edition:7.0

IEC 60079-1:2014-06 Explosive atmospheres - Part 1: Equipment protection by flameproof enclosures "d" Edition:7.0

This Certificate **does not** indicate compliance with safety and performance requirements other than those expressly included in the Standards listed above.

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in:

Test Reports:

US/UL/ExTR18.0044/00 US/UL/ExTR18.0044/01

Quality Assessment Report:

DK/ULD/QAR18.0002/06



Certificate No.: IECEx UL 18.0036X Page 3 of 4

Date of issue: 2022-04-12 Issue No: 2

EQUIPMENT:

Equipment and systems covered by this Certificate are as follows:

The Drive Module, DRV-SW-001925, is a flameproof enclosure with two motors located completely within the enclosure. The Drive Module contains two separate drive connections through the wall of the flameproof housing for mechanical connections to the internal motors. The Drive Module is rated for continuous duty for up to a 5A total load (2.5 A for each end). The Drive Module is rated for a duty cycle of up to 10A for 90 minutes with power on and at least 12 hours with power off.

Please see Annex for additional information.

SPECIFIC CONDITIONS OF USE: YES as shown below:

• Do not repair the flameproof joints



Certificate No.: IECEx UL 18.0036X Page 4 of 4

Date of issue: 2022-04-12 Issue No: 2

DETAILS OF CERTIFICATE CHANGES (for issues 1 and above)

Issue 1: Updates to the latest standards, update of the entry placement on the enclosure, and updating of the ambient temperature.

Issue 2: Update of manufacturing location address. No update of ExTR for this issue.

Annex:

Annex to IECEx UL 18.0036X Issue 2.pdf



Certificate No.: IECEx UL 18.0036X

Issue No.: 2

Page 1 of 1


PARAMETERS RELATING TO THE SAFETY

36V DC, 5 Amp continuous or 10 Amp Duty

The Drive Module is rated for continuous duty for up to a 5A total load (2.5 A for each end). The Drive Module is rated for a duty cycle of up to 10A for 90 minutes with power on and at least 3 hours with power off.

MARKING

Marking has to be readable and indelible; it has to include the following indications:

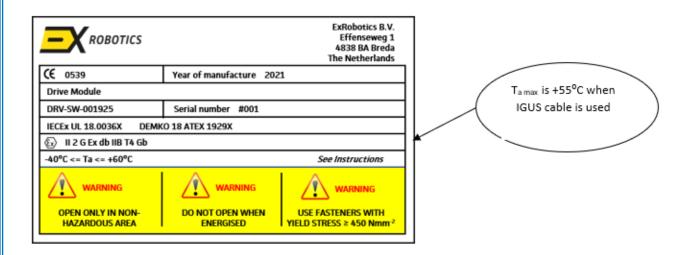

LIST OF CERTIFIED COMPONENTS

The following additional previous editions of Standards noted under the "Standards" section of this Certificate were applied to integral Components as itemized below. There are no significant safety related changes between these previous editions and the editions noted under the "Standards" section.

Product	Certificate Number	Standards
CMP Ex "d" barrier gland 20SPX2KREX1RA4	IECEx SIR 13.0027X	IEC 60079-1 Edition 2007